


kVA

SilentPower™

The Cummins Power Generation SilentPower concept has been designed to meet or exceed the future European legislation 2000/14/EC Step 2006. The design is modular so fits directly to the OpenSet for competitiveness and to provide flexibility for manufacturing and availability. The OpenSet bunding and handling features are included but there is an added single point lift as standard.

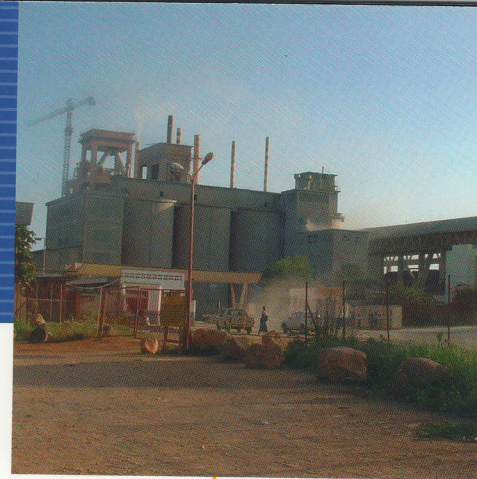

C15 D5
SilentPower



C38 D5
SilentPower

50 Hz

Model Name	Canopy Type	Enclosed Version (SilentPower)			Noise Level		
		Tank	Dimension (L x W x H)	Wet Weight (kg)	LWA	dBA @ 1m*	dBA @ 7m*
C11 D5	SE-3A	88	1454 x 769 x 1417	638	88	72	62
C15 D5	SE-3A	88	1454 x 769 x 1417	647	88	72	62
C22 D5	SE-4A	144	2124 x 990 x 1575	887	94	77	67
C33 D5	SE-4A	144	2124 x 990 x 1575	923	94	77	67
C38 D5	SE-4A	144	2124 x 990 x 1575	983	94	77	67
C55 D5	SE-4A	144	2124 x 990 x 1575	1054	94	77	67

60 Hz

Model Name	Canopy Type	Enclosed Version (SilentPower)			Noise Level		
		Tank	Dimension (L x W x H)	Wet Weight (kg)	LWA	dBA @ 1m*	dBA @ 7m*
C11 D6	SE-3A	88	1454 x 769 x 1417	638	N/A	74	64
C15 D6	SE-3A	88	1454 x 769 x 1417	647	N/A	74	64
C25 D6	SE-4A	144	2124 x 990 x 1575	887	N/A	80	70
C30 D6	SE-4A	144	2124 x 990 x 1575	923	N/A	80	70
C35 D6	SE-4A	144	2124 x 990 x 1575	983	N/A	80	80
C50 D6	SE-4A	144	2124 x 990 x 1575	1054	N/A	80	70

* @ 75% load.

11-50 kW @ 60 Hz for Prime and Standby